


# Product data sheet

3-gang switch (insert), 1-pole, 2-way

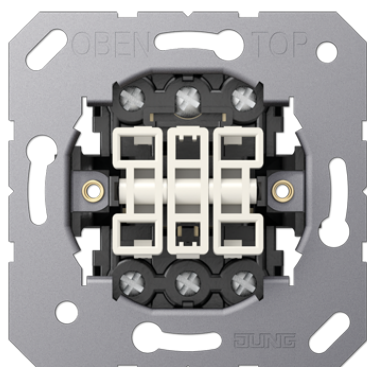

## Reference number

5306 EU

### 3-gang switch 10 AX / 250 V ~ (insert)

with screw terminals for rigid and flexible wires

screw fixing only, without claws

Only for A and LS ranges.

When mounting/dismounting the 3-gang rocker, the middle part has to be clipped on last or removed first.

Installation into flush box min. 63 mm (depth)

#### Notice!

**Installation only by persons with relevant electrical knowledge and experience!\*)**

**Use only with original JUNG product components approved for this article.**

By inappropriate installation you endanger

- your own life,
- the life of the user of the electrical appliance.

By inappropriate installation you risk a high loss by damage, e.g. risk by fire.

You assume personal liability in cause of injury to persons or damage of appliances.

**Please contact a skilled electrician!**

**\*) Required technical knowledge for installation:**

For installation, especially the following technical knowledge is required:

- the 5 important safety rules: disconnect from mains, secure against reconnecting, verify parts are free of voltage, ground and short-circuit, cover or block off adjacent live parts
- select adequate tools, measuring devices and personal protective equipment
- evaluate measuring results
- selection of the electrical installation material to secure switch-off conditions
- IP protection levels
- installation of the electrical installation material
- type of electric power grid (TN system, IT system, TT system) and the resultant connection terms (common grounding, protective ground, required additional action etc.)

#### Version:

1-pole, 2-way

#### Power SBL (self-ballasted lamps):

max. 100 W