


MINI ONE collection

MINI ONE è un cubo di piccole dimensioni dal design rigoroso e geometrico, che unisce sobria eleganza con grande flessibilità di utilizzo: il corpo base può essere installato per ottenere luce radente sulle pareti e a plafone e come proiettore con l'apposita staffa. La purezza di MINI ONE è esaltata dalla totale assenza di viti a vista ed attacco a parete totalmente a scomparsa. È disponibile in versione a due e a quattro finestre e, in alternativa, con lame di luce. La versione a paletto è concepita per l'illuminazione di vialetti e giardini.

MINI ONE is a cube of small size from rigorous and geometric design, combining elegance and great flexibility of use: the basic version can be installed to get grazing light on the walls and ceiling and as a floodlight with the supplied bracket. The purity of MINI ONE is enhanced by the total absence of visible screws and wall mount totally hidden. It is available with two and four windows and, alternatively, with blades of light. The bollard version is designed for lighting pedestrian walkways and gardens.



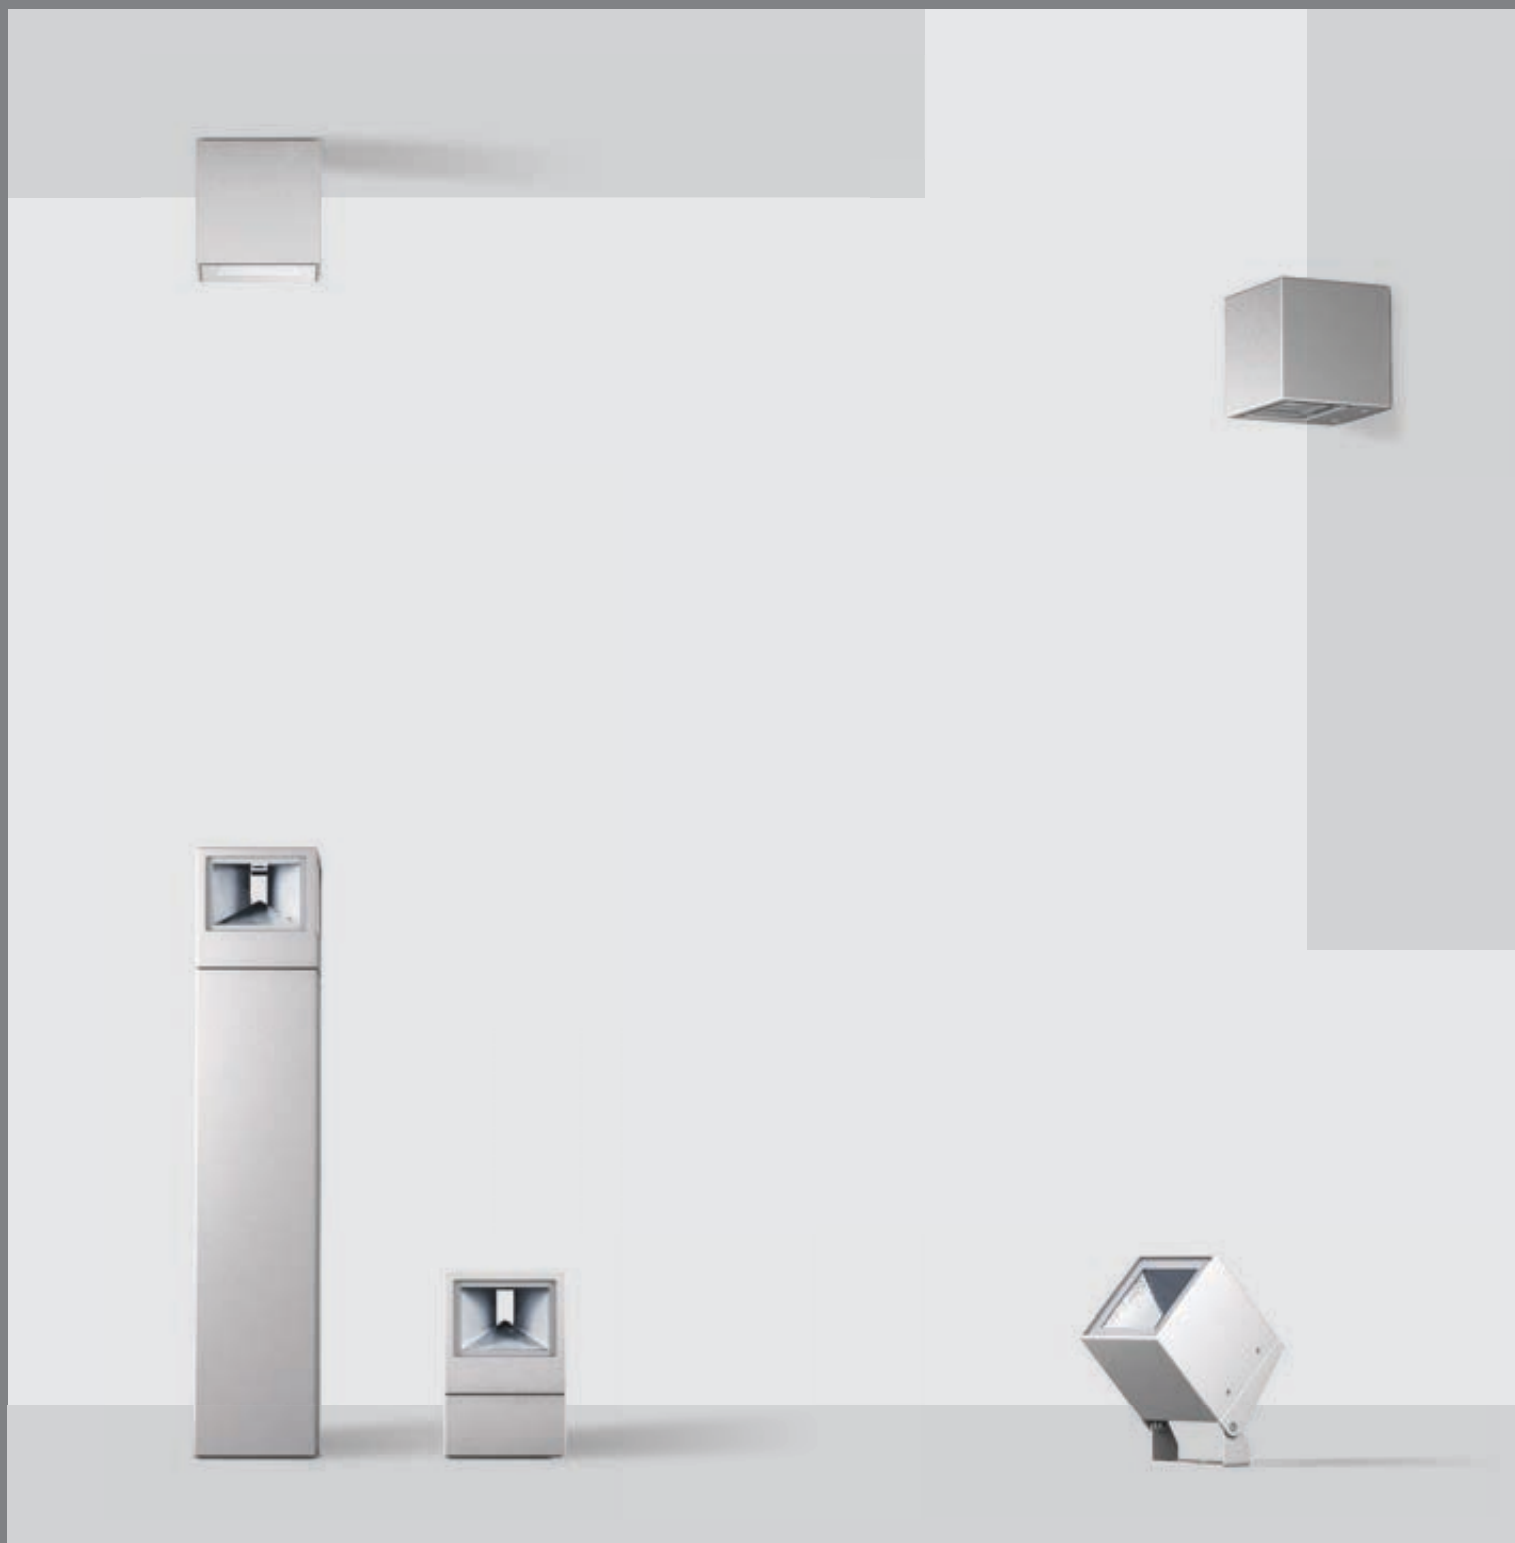

INFORMAZIONI TECNICHE

Corpo e base realizzati in lega di alluminio pressofuso verniciato e resistente alla corrosione. Protezione con trattamento di anodizzazione, fondo con polveri epossidiche e verniciatura poliesteri. Assenza di viti a vista.

TECHNICAL INFORMATION



Body and fixing plate made of die-cast aluminium alloy, corrosion resistant. Protection with anodizing treatment, epoxy powder base coating and polyester painting. Product with no visible screws.





WHITE LED 230V





10 09 611
LED 3000K CRI>80
 1,5W / 165 lm LED data
2,9W / 60 lm Real data
 220-240V 0/50/60Hz
 1 lens
Transparent glass
 A / A+ / A++

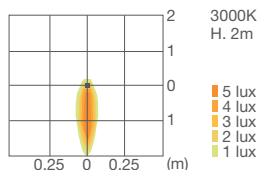

10 09 616
LED 3000K CRI>80
 1,5W / 165 lm LED data
2,9W / 80 lm Real data
 220-240V 0/50/60Hz
 1 opening
Transparent glass
 A / A+ / A++

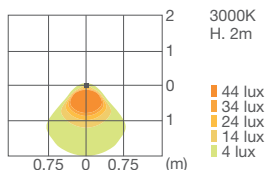

10 11 611
LED 3000K COB CRI>80
 6W / 750 lm LED data
7,8W / 220 lm Real data
 220-240V 0/50/60Hz
 1 opening
Sandblasted glass
 A / A+ / A++

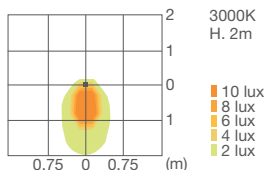

PRODUCT INFORMATION

IP65
 IK 07
 5 mm flat tempered glass
 Cable input Ø 1÷13 mm
 Surge protection included

AVAILABLE COLOURS

■ .06 grey
 ■ .08 anthracite
 Other colours on request

TECHNICAL DATA





WHITE 3 LED 230V



HIGH-PERFORMANCE



10 10 111
3 LED 3000K CRI>80
 5W / 495 lm LED data
6,2W / 470 lm Real data
 220-240V 0/50/60Hz
 1 opening
Transparent glass
 A / A+ / A++

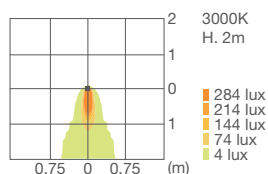

10 10 113
3 LED 3000K CRI>80
 5W / 495 lm LED data
6,2W / 440 lm Real data
 220-240V 0/50/60Hz
 1 opening
Transparent glass
 A / A+ / A++

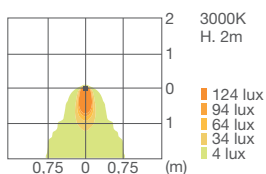

Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)
 Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

INFO
 Ulteriori versioni sono disponibili consultando www.platek.eu

More versions are available on www.platek.eu

LED LED COLOURS TEMPERATURE 4000K

Other LED colours available on request

COLORS

FINISHES
 ■ .01 black
 ■ .02 white
 ■ .07 corten
 ■ .09 bronze




More details at: platek.eu/MINIONEapplique

WHITE LED 230V




2 OPENINGS
TRANSPARENT

10 09 617
LED 3000K CRI>80
3W / 330 lm LED data
4,7W / 160 lm Real data
220-240V 0/50/60Hz
2 openings
Transparent glass
A / A+ / A++



625
cd/klm




3000K
H. 2m
20 lux
16 lux
12 lux
8 lux
4 lux




2 OPENINGS
SANDBLASTED

10 11 612
LED 3000K COB CRI>80
6W / 750 lm LED data
7,8W / 440 lm Real data
220-240V 0/50/60Hz
2 openings
Sandblasted glass
A / A+ / A++



877
cd/klm



3000K
H. 2m
18 lux
14 lux
10 lux
6 lux
2 lux



PRODUCT INFORMATION

IP65
IK 07
5 mm flat tempered glass
Cable input Ø 1÷13 mm
Surge protection included


AVAILABLE COLOURS

.06 grey
.08 anthracite
Other colours on request

TECHNICAL DATA




WHITE LED 230V




2 LENSES


10 09 612
LED 3000K CRI>80
3W / 330 lm LED data
4,7W / 120 lm Real data
220-240V 0/50/60Hz
2 lenses
A / A+ / A++



3380
cd/klm




3000K
H. 2m
9 lux
7 lux
5 lux
3 lux
1 lux




1 LENS
1 OPENING

10 09 615
LED 3000K CRI>80
3W / 330 lm LED data
4,7W / 140 lm Real data
220-240V 0/50/60Hz
1 lenses + 1 opening
Transparent glass
A / A+ / A++



1071
cd/klm



3000K
H. 2m
10 lux
8 lux
6 lux
4 lux
2 lux



Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)
Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

INFO
Ulteriori versioni sono disponibili consultando www.platek.eu

More versions are available on www.platek.eu

LED
LED COLOURS
TEMPERATURE
4000K


Other LED colours available on request

COLORS
FINISHES
.01 black
.02 white
.07 corten
.09 bronze




More details at:
platek.eu/MINIONEapplique

WHITE LED 230V




4 OPENINGS
TRANSPARENT

10 09 618
LED 3000K CRI>80
6W / 660 lm LED data
7,6W / 240 lm Real data
220-240V 0/50/60Hz
4 openings
Transparent glass
A / A+ / A++




625
cd/klm




3000K
H. 2m

36 lux
28 lux
20 lux
12 lux
4 lux




4 OPENINGS
SANDBLASTED

10 11 614
LED 3000K COB CRI>80
6W / 750 lm LED data
7,8W / 520 lm Real data
220-240V 0/50/60Hz
4 openings
Sandblasted glass
A / A+ / A++



877
cd/klm




3000K
H. 2m

34 lux
26 lux
18 lux
10 lux
2 lux




WHITE LED 230V




4 LENSES

10 09 614
LED 3000K CRI>80
6W / 660 lm LED data
7,6W / 200 lm Real data
220-240V 0/50/60Hz
4 lenses
A / A+ / A++



1690
cd/klm



3000K
H. 2m

41 lux
31 lux
21 lux
11 lux
1 lux



PRODUCT INFORMATION

IP65
IK 07
5 mm flat tempered glass
Cable input Ø 1÷13 mm
Surge protection included

AVAILABLE COLOURS

.06 grey
.08 anthracite
Other colours on request

TECHNICAL DATA



Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)
Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

INFO
Ulteriori versioni sono disponibili consultando www.platek.eu

More versions are available on www.platek.eu

LED LED COLOURS TEMPERATURE

4000K

Other LED colours available on request

COLORS

FINISHES


.01 black
.02 white
.07 corten
.09 bronze



More details at: platek.eu/MINIONEapplique




**WHITE
COB LED
230V**




DIFFUSE



10 11 615
LED 3000K COB CRI>80
 6W / 750 lm LED data
7,8W / 525 lm Real data
 220-240V 0/50/60Hz
Sanblasted glass
 A / A+ / A++



250
cd/klm



3000K
 H. 3m
 @350 mA
 21 lux
 19 lux
 17 lux
 15 lux
 13 lux
 (m)

! Transparent extra glass available on request


PRODUCT INFORMATION

IP65
 IK 07
 5 mm flat tempered glass
 Cable input Ø 1÷13 mm
 Surge protection included

AVAILABLE COLOURS

■ .06 grey
 ■ .08 anthracite
 Other colours on request

TECHNICAL DATA



Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)
Available upon request without surcharge (for the code composition, please refer to page 9)

LED
LED COLOURS
TEMPERATURE
 4000K
 Other LED colours available on request


COLORS
FINISHES
 ■ .01 black
 ■ .02 white
 ■ .07 corten
 ■ .09 bronze

HELP YOU
INFO
 Ulteriori versioni sono disponibili consultando www.platek.eu
 More versions are available on www.platek.eu







**WHITE
COB LED
230V**



WIDE

10 13 615
LED 3000K COB CRI>80
6W / 750 lm LED data
7,8W / 615 lm Real data
220-240V 0/50/60Hz
Sandblasted glass
A / A+ / A++

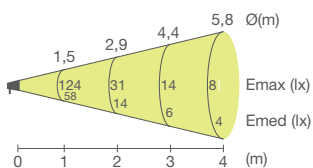

! Transparent extra glass available on request


PRODUCT INFORMATION

IP65
IK 05
5 mm flat tempered sandblasted glass
Cable input Ø 1±13 mm
Surge protection included

AVAILABLE COLOURS

■ .06 grey
■ .08 anthracite
Other colours on request

TECHNICAL DATA


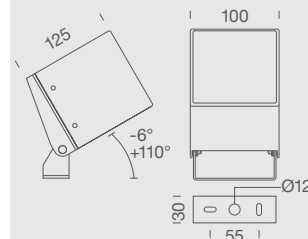


**WHITE
3 LED
230V**





SPOT

10 12 111
3 LED 3000K CRI>80
5W / 565 lm LED data
6,2W / 470 lm Real data
220-240V 0/50/60Hz
Transparent glass
A / A+ / A++

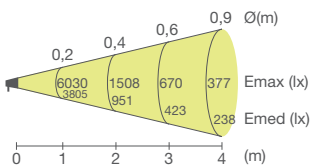

MEDIUM

10 12 113
3 LED 3000K CRI>80
5W / 565 lm LED data
6,2W / 440 lm Real data
220-240V 0/50/60Hz
Transparent glass
A / A+ / A++

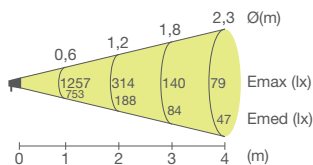

**RGBW LED
available
on request**


PRODUCT INFORMATION

IP65
IK 05
5 mm flat tempered extra clear glass
Cable input Ø 1±13 mm
Surge protection included

AVAILABLE COLOURS

■ .06 grey
■ .08 anthracite
Other colours on request

TECHNICAL DATA

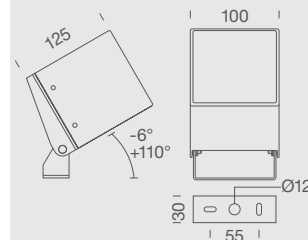

Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)
Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

LED LED COLOURS TEMPERATURE 4000K

Other LED colours available on request

OPTICS OPTIC WIDE

COLORS FINISHES
■ .01 black
■ .02 white
■ .07 corten
■ .09 bronze

INFO
Ulteriori versioni sono disponibili consultando www.platek.eu

More versions are available on www.platek.eu

ACCESSORI (per maggiori dettagli consultare pagina 321)
ACCESSORIES (for further details please refer to page 321)

FIXING
page 339
90 05 605 - Spike



More details at:
[platek.eu/
MINIONE
floodlight](http://platek.eu/MINIONE_floodlight)



WHITE
COB LED
230V



1 OPENING




2 OPENINGS




4 OPENINGS




10 15 611
LED 3000K COB CRI>80
6W / 750 lm LED data
7,8W / 285 lm Real data
220-240V 50/60Hz
1 opening
Transparent glass
A / A+ / A++




1586
cd/klm

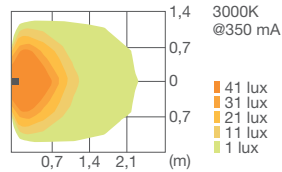


10 15 612
LED 3000K COB CRI>80
6W / 750 lm LED data
7,8W / 505 lm Real data
220-240V 50/60Hz
2 openings
Transparent glass
A / A+ / A++




1586
cd/klm

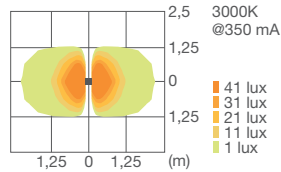

10 15 614
LED 3000K COB CRI>80
6W / 750 lm LED data
7,8W / 515 lm Real data
220-240V 50/60Hz
4 openings
Transparent glass
A / A+ / A++



1586
cd/klm

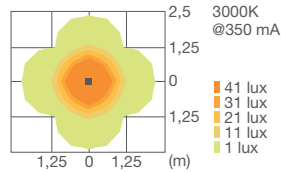

PRODUCT INFORMATION

IP65
IK 07
5 mm flat tempered
extra clear glass
Cable input Ø 1÷13 mm
Surge protection included

IP68 connector excluded
to be ordered separately

AVAILABLE COLOURS
■ .06 grey
■ .08 anthracite
Other colours on request

TECHNICAL DATA



Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)
Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

LED
LED COLOURS
TEMPERATURE
4000K

Other LED colours
available on request

COLORS FINISHES
■ .01 black
■ .02 white
■ .07 corten
■ .09 bronze

ACCESSORI (per maggiori dettagli consultare pagina 321)
ACCESSORIES (for further details please refer to page 321)

FIXING
page 341
89 50 045 - Tie rod
90 05 190 - Spike

INFO
Ulteriori versioni sono
disponibili consultando
www.platek.eu

More versions are available on
www.platek.eu




More details at:
platek.eu/
MINIONEbollard



WHITE
COB LED
230V



1 OPENING





2 OPENINGS




4 OPENINGS





10 50 611
LED 3000K COB CRI>80
8W / 1000 lm LED data
10,3W / 650 lm Real data
220-240V 50/60Hz
1 opening
Transparent glass
A / A+ / A++

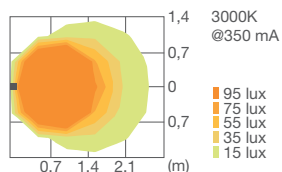

10 50 612
LED 3000K COB CRI>80
8W / 1000 lm LED data
10,3W / 680 lm Real data
220-240V 50/60Hz
2 openings
Transparent glass
A / A+ / A++

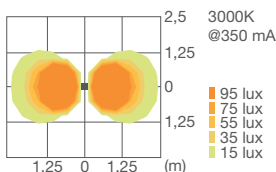

10 50 614
LED 3000K COB CRI>80
8W / 1000 lm LED data
10,3W / 720 lm Real data
220-240V 50/60Hz
4 openings
Transparent glass
A / A+ / A++

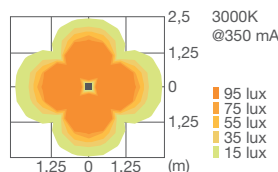

PRODUCT INFORMATION


IP65
IK 07
5 mm flat tempered
extra clear glass
Cable length 1 m (3 x 1 mm²)
Surge protection included

IP68 connector excluded
to be ordered separately


AVAILABLE COLOURS

■ .06 grey
■ .08 anthracite
Other colours on request

TECHNICAL DATA



WHITE
COB LED
230V



1 OPENING





2 OPENINGS




4 OPENINGS





10 80 611
LED 3000K COB CRI>80
8W / 1000 lm LED data
10,3W / 650 lm Real data
220-240V 50/60Hz
1 opening
Transparent glass
A / A+ / A++

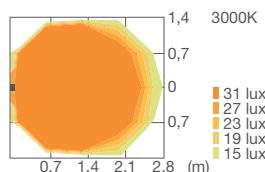

10 80 612
LED 3000K COB CRI>80
8W / 1000 lm LED data
10,3W / 680 lm Real data
220-240V 50/60Hz
2 openings
Transparent glass
A / A+ / A++

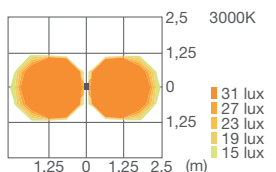

10 80 614
LED 3000K COB CRI>80
8W / 1000 lm LED data
10,3W / 720 lm Real data
220-240V 50/60Hz
4 openings
Transparent glass
A / A+ / A++

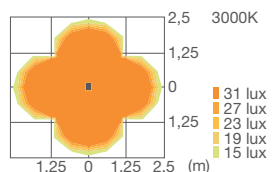

PRODUCT INFORMATION


IP65
IK 07
5 mm flat tempered
extra clear glass
Cable length 1 m (3 x 1 mm²)
Surge protection included

IP68 connector excluded
to be ordered separately

AVAILABLE COLOURS

■ .06 grey
■ .08 anthracite
Other colours on request

TECHNICAL DATA



Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)
Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

INFO
Ulteriori versioni sono
disponibili consultando
www.platek.eu

More versions are available on
www.platek.eu

LED LED COLOURS
TEMPERATURE
4000K

Other LED colours
available on request

COLORS FINISHES
■ .01 black
■ .02 white
■ .07 corten
■ .09 bronze

ACCESSORI (per maggiori dettagli consultare pagina 321)
ACCESSORIES (for further details please refer to page 321)

FIXING
page 341
89 50 045 - Tie rod
90 05 190 - Spike



More details at:
[platek.eu/
MINIONEbollard](http://platek.eu/MINIONEbollard)