

# PRODUCT DATASHEET

## ENDURA Flood 50 W 4000 K DG

ENDURA® FLOOD Cool White | Outdoor luminaires in 4000K



### Areas of application

- Outdoor
- Replacement for floodlights with halogen lamps
- Garages
- Building facades

### Product benefits

- Quick and simple installation thanks to low profile, compact and light weight design
- Energy savings of up to 80 % compared to halogen lamp floodlights
- Semi-frosted, tempered glass cover for uniform illumination

### Product features

- Very bright and functional outdoor LED luminaires
- Symmetrical beam angle: 110° x 110°
- Mounting bracket for up to 180° tilting
- Type of protection: IP65
- Ambient temperature in operation: -20...+45 °C
- Connection via 1 m cable, wiring required



---

**TECHNICAL DATA****Electrical data**


Nominal wattage	50.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	220.000 mA
Max. number of luminaires per miniature circuit breaker B16	58
Max. number of luminaires per miniature circuit breaker C16	58
Power factor $\lambda$	> 0.90
Total harmonic distortion	< 20 %
Protection class	I
Operating mode	ELECTRONIC CONTROL GEAR (ECG)

**Photometrical data**

Luminous flux	4500 lm
Luminous efficacy	90 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	$\geq 80$
Standard deviation of color matching	6 sdc <sub>m</sub>
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG1
Beam angle	120 °




ENDURA FLOOD 50W 840 DG

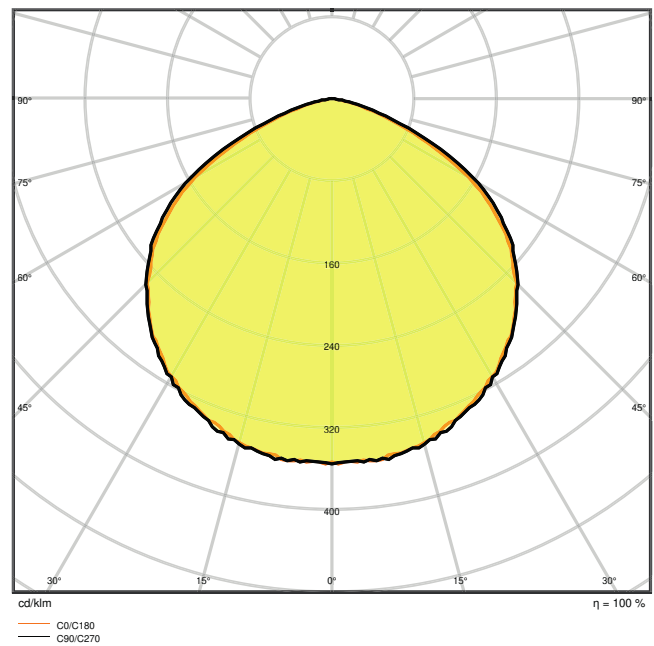

ENDURA FLOOD 50W 840 DG

Dimensions & Weight

Length	245.00 mm
Width	210.00 mm
Height	43.00 mm
Product weight	1070.00 g



ENDURA FLOOD 50W

Materials & Colors

Product color	Dark gray
Housing color	Dark gray
Body material	Aluminum
Cover material	Glass
Mercury content	0.0 mg

## Application & Mounting

Ambient temperature range	-20...+45 °C
Temperature range at storage	-30...+70 °C
Type of connection	Cable, 3-pole
Type of protection	IP65
Protection class IK (shock resistance)	IK06
Dimmable	No
Mounting type	Surface
Mounting location	Wall
Application environment	Outdoor
With light source	Yes

## Lifespan

Lifespan L70/B50 at 25 °C	30000 h <sup>1)</sup>
Number of switching cycles	15000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

## Certificates & Standards

Standards	CE / EAC / UKCA
Luminaire with limited surface temperature, "D sign"	No
Replaceable light source (EPREL)	Not replaceable


## Additional product data




BEG eligible	No
--------------	----

## Safety advice






- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.
- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.

## DOWNLOAD DATA

Documents and certificates	Document name
 User Instruction / Safety Instructions	ENDURA FLOOD

Documents and certificates		Document name
	Legal information	OUTDOOR LUMINAIRES
	Declarations of conformity	CE Declaration Endura Floodlight
	Declarations Of Conformity UKCA	FLOODLIGHT

Photometric and lighting design files		Document name
	IES file (IES)	ENDURA FLOOD 50W 840 DG
	LDT file (Eulumdat)	ENDURA FLOOD 50W 840 DG
	UGR file (UGR table)	ENDURA FLOOD 50W 840 DG
	LDC typ cone	ENDURA FLOOD 50W 840 DG
	LDC typ polar	ENDURA FLOOD 50W 840 DG

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075206724	Folding box 1	60 mm x 216 mm x 259 mm	1139.00 g	3.36 dm <sup>3</sup>
4058075206731	Shipping box 8	445 mm x 250 mm x 280 mm	9542.00 g	31.15 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.